



OUR INTEGRATION — YOUR SUCCESS ARPAC LLC

9555 W. Irving Park Road



Schiller Park, IL 60176

Phone: 847-678-9034 • Fax: 847-671-7006

Email: info@arpac.com

Item # BC 3025, 10' Wire Mesh Conveyor for Product Loads

While ARPAC's Palletizers are complete for most applications, we know that many customers have special requirements and we are ready to handle them. A wide variety of Pallet Handling and Product Handling Accessories are available to meet your specific application requirements.

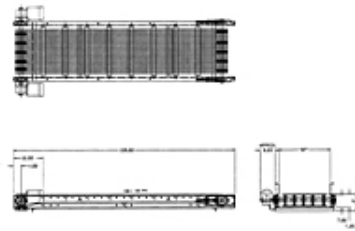

STANDARD SPECIFICATIONS

- Frame & Bed - 2-1/2" Dia. rollers, 11/16" hex shaft 11 GA mounted on 4" centers in a 7" deep 1/4" HRS channel with 2" flanges
- Frame Width - 28" and 40" BF
- Drive Sprockets
- 18 T forged sprockets for speeds up to 60 FPM
- 18 T hardened machine sprocket for speeds over 60 FPM

- Belt Width - 24", and 34", 1" x 1" clinched edge wire mesh belting
- Motor - 1/2 HP C face with shaft mounted reducer, 230/460V, 60HZ, 3 PH
- Take Up - Bearing adjustment using threaded rod on tail sprocket
- Return Rolls - 2-1/2" Dia. rollers
- Guards Rails - 6" channel 12 GA with 2" flange
- Floor Supports - Standard heavy-duty adjustable. One support each end of the conveyor
- Capacity - 200 lbs/ft.