



OUR INTEGRATION — YOUR SUCCESS ARPAC LLC

9555 W. Irving Park Road


Schiller Park, IL 60176

Phone: 847-678-9034 • Fax: 847-671-7006

Email: info@arpac.com

Item # Electro-Wrap EWA-T Series, Electro-Wrap Automatic Rotary Tower Stretch Wrapper

The ARPACSTRETCH™ model Electro-Wrap Rotary Tower, is a robust wrapper designed, manufactured and supported to offer trouble free operation.

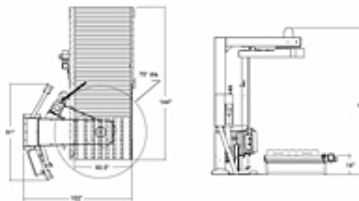

FEATURES

Machine Features

- Flashing safety beacon
- Adjustable top and bottom illuminated LED wrap counters
- Magnetic proximity switches in place of mechanical limit switches
- Top film overwrap control feature (TOC)
- Electronic film tension adjustment control on control panel
- Long-range photo eye for automatic load height sensing
- User-friendly push button operator control panel
- Built-in self-diagnostics
- Positive home position alignment
- End pallet stop included

System Components

- Heavy-duty, welded steel construction (no plastic panels) designed for long life
- Eco-friendly, durable powder coating
- Up to 15 RPM rotating arm can deliver 25–55 loads per hour
- Dual V-belt drive rotating arm
- NEMA 3 commutator

Conveyors

- Chain driven roller conveyor can support up to 4,000 lb.
- Three strand drag chain conveyor can support up to 3,000 lb.
- Integrated film clamp
- Automatic indexing

Controls Hardware

- Allen-Bradley® power, control, and safety components
- Allen-Bradley® MicroLogix™ PLC
- NEMA 12 electrical cabinet
- UL/CSA approved components

Film Delivery System

- EZ-Load® film pre-stretch dispenser for 20" film rolls
- Dual anti-static film rollers with manufacturer's lifetime warranty
- Film pre-stretch capability from 150 to 300% stretch (200% standard)
- Variable carriage speed up to 21 feet per minute
- Belt lift for quiet operation
- Dancer bar variable corner compensation
- Electronic film tension adjustment control