

CED 1500

Hi Performance Dispenser



The CED 1500 is designed using the highest quality materials and state-of-the-art technology providing our customers with consistent drink quality.

- Stainless steel cabinet, water bath, product lines, and splash plate; removable refrigeration deck
- Available with 5 or 6 post-mix dispensing valves
- All valves can be serviced independently
- Insulation is CFC-free structural foam

- All installation from front of unit
- CFC-free, R134A Refrigerant
- Optional lighted front marquee kit and leg kit
- Standard capacity 1/3 hp,
 30 lb ice bank, flooded manifold
- Flex manifold configuration for multiple non-carbonated drinks




CED 1500 Hi Performance

OPTIONS

Lighted Marquee



SPECIFICATIONS

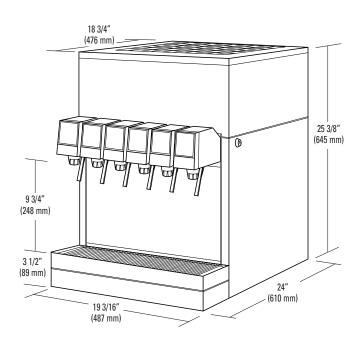

COMPRESSOR

1/3 hp

MOTORS

Agitator: 25 w Condenser fan: 9 w

ICE BANK CONTROL

Lancer Electronic Ice Bank Control

TRANSFORMER

24 VAC Secondary

WATER

Capacity: 12 gallons

DIMENSIONS

Width: 19.187 in (487 mm) Depth: 24 in (610 mm) Height: 25.375 in (645 mm)

ELECTRICAL

115VAC/60Hz, 4.5 AMPs 230VAC/50Hz, 4.5 AMPs

WEIGHT

Empty: 130 lbs (59 kg) Operating: 220 lbs (99.8 kg) Shipping: 150 lbs (68 kg)

ICE

Capacity: 30 lbs (13.6 kg)

FITTINGS

Soda inlets: 3/8" male barb Syrup inlets: 3/8" male barb

VALVES

LEV® and other valves available upon request

FLEX MANIFOLD CONFIGURATION

5 valve 2-2-1 6 valve 3-2-1

KEY LOCK SWITCH

DRAW PERFORMANCE Number of Drinks Below 40°F

75°F (24°C) Ambient Temperature

395 drinks; 12oz. / 2 drinks per minute 220 drinks; 12oz. / 4 drinks per minute

90°F (32°C) Ambient Temperature

200 drinks; 12oz. / 2 drinks per minute 106 drinks; 12oz. / 4 drinks per minute

Warranty: For warranty specifics by product, contact your Lancer Sales Representatives.

CORPORATE OFFICE 6655 Lancer Blvd = San Antonio, TX 78219 210-310-7000 = 1-800-729-1500 = FAX 210-310-7250 = www.lancercorp.com