

CED 8000

High Performance Dispenser



The CED 8000 is designed using the highest quality materials and state-of-the-art technology providing our customers with consistent drink quality.

- Stainless steel cabinet, water bath, product lines; removable refrigeration deck
- Available with 8 post-mix dispensing valves
- All valves can be serviced independently
- Insulation is CFC-free, 0 GWP structural foam
- All installation from front of unit

- CFC-free, R134A Refrigerant
- Optional lighted front marquee kit
- 3/4 hp compressor,
 55 lb ice bank, flooded high performance manifold
- Flex manifold configuration for multiple non-carbonated drinks
- Built-in cold carbonation
- Removable ice bank probe
- Optional air filter






CED 8000 High Performance

OPTIONS

Lighted Marquee



SPECIFICATIONS

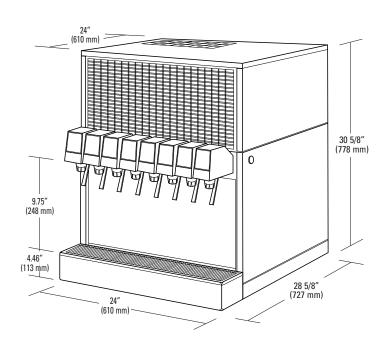

COMPRESSOR

3/4 hp

MOTORS

Agitator: 25 w Condenser fan: 35 w

ICE BANK CONTROL

Lancer Electronic Ice Bank Control

TRANSFORMER

24 VAC Secondary

WATER

Capacity: 20 gallons

DIMENSIONS

Width: 24 in (610 mm) Depth: 28.625 in (727 mm) Height: 30.625 in (778 mm)

ELECTRICAL

115VAC/60Hz, 14AMPs 230VAC/50Hz, 7AMPs

WEIGHT

Empty: 220 lbs (99.8 kg) Operating: 386 lbs (175 kg) Shipping: 267 lbs (121 kg)

ICE

Capacity: 55 lbs (25 kg)

FITTINGS

Water inlets: 3/8" male barb Syrup inlets: 3/8" male barb

VALVES

LEV® and other valves available upon request

FLEX MANIFOLD CONFIGURATION

8 valve 3-5

KEY LOCK SWITCH

DRAW PERFORMANCE Number of Drinks Below 40°F

75°F (24°C) Ambient Temperature Indefinite drinks; 12oz. / 2 drinks per min.

90°F (32°C) Ambient Temperature 300+ 12oz. / 2 drinks per min. 219 drinks; 12oz. / 4 drinks per minute

Warranty: For warranty specifics by product, contact your Lancer Sales Representatives.

CORPORATE OFFICE 6655 Lancer Blvd = San Antonio, TX 78219 210-310-7000 = 1-800-729-1500 = FAX 210-310-7250 = www.lancercorp.com