


ST 6110

Interroll Pusher

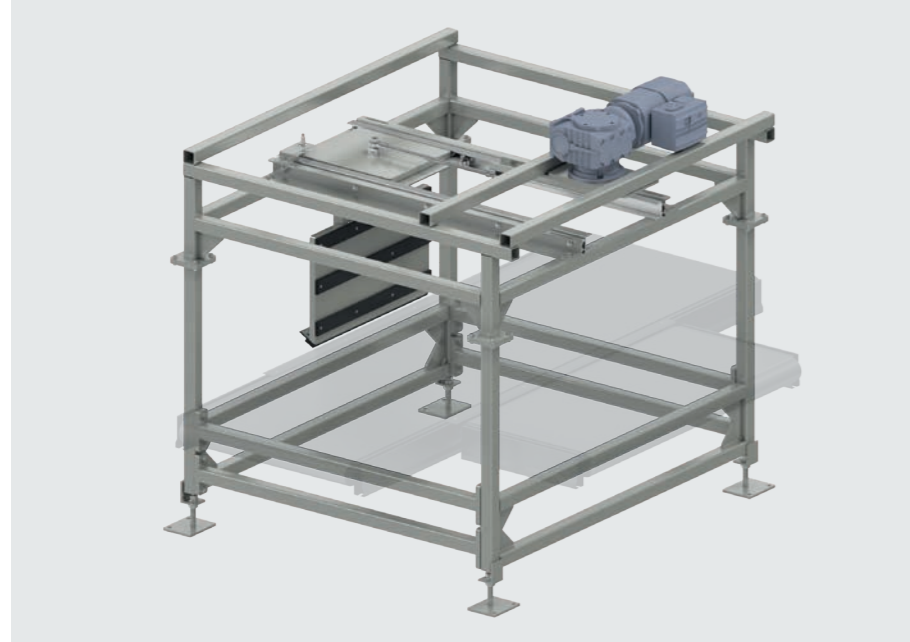

Product Description

The push crank diverter pushes materials away at a 90° angle to the conveying direction. This is done gently despite high speeds, thanks to the electrically powered crank mechanism.

Technical data

General technical data	Max. load capacity*	50 kg/m
	Max. startup current	1,500 items/h (depending on material)
	Ambient temperature	+5 to +40 °C
Dimensions	Angles	90°
	Suitable conveyor modules	Belt conveyor Roller conveyor
Drive	Pusher drive	400 V gear motor

*The combination of maximum values is not always possible.