


**UNISOURCE**  
**SERIES 402**  
**Stainless Steel**  
**Connector,**  
**Flanged**

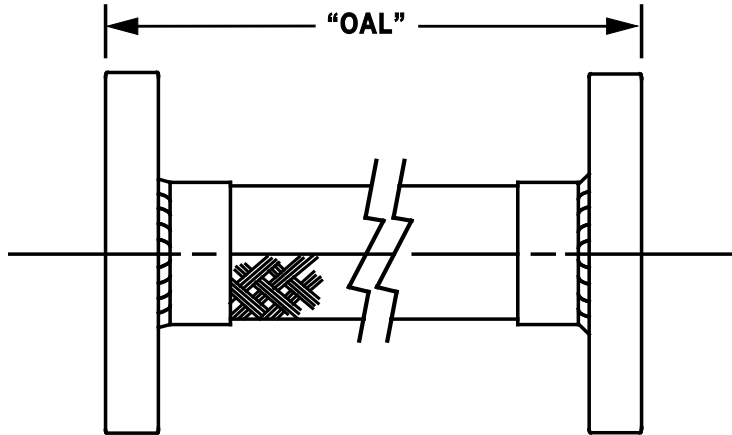

**Construction, Materials:**

**Hose:** *Series 300 Stainless Steel  
Corrugated Hose .008 to .012 Wall*

**Braid:** *Series 300 Stainless Steel  
One Braid (8" & larger is braided-  
braid).*

**Ends:** *Carbon Steel 150# Drilled  
Flat-Face Plate Flanges*

**Maximum permanent offset from centerline: 3/8"**  
**Maximum intermittent offset from centerline: 1/8"**

Qty	Size (In.)	Part #	Overall Length (Inches)	W.P. @ 70° F. (psi)	W.P. @ 250° F (psi)	Corrs Per Inch	Min. Bend Rad Static (In.)	Min. Bend Rad Dynamic (In.)	Approx. Weight (Lbs.)
	1-1/2	402-150	9	410	377	64	6	13	10.0
	2	402-200	9	455	419	62	7	16	12.0
	2-1/2	402-250	9	345	317	26	8	18	13.3
	3	402-300	9	290	267	30	10	22	14.8
	4	402-400	9	250	230	21	13	26	20.0
	5	402-500	11	200	184	23	17	34	28.0
	6	402-600	11	210	193	25	19	41	32.0
	8	402-800	12	190	175	21	23	50	58.0
	10	402-1000	13	150	138	18	29	67	76.0
	12	402-1200	14	140	129	17	34	70	108.0
	14	402-1400	14	150	138	15	42	79	118.0

Customer: \_\_\_\_\_  
 Project: \_\_\_\_\_  
 Engineer: \_\_\_\_\_  
 PO#: \_\_\_\_\_

**UNISOURCE** MFG.

*Unisource Series 402  
Stainless Steel Flanged Connector*