



SCALEMASTER HP SUPERIOR Series 6PJ

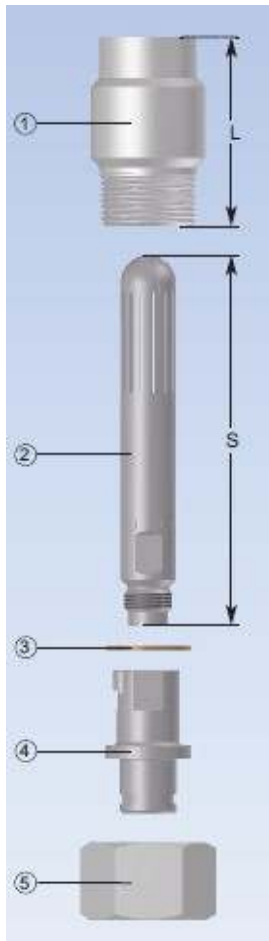

PATENTED

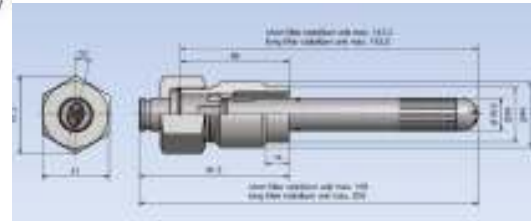

	Ordering No						(Gallons Per Minute)		
	Type				TC	A ∅ [mm]	p[psi]		
	22°	26°	30°	40°			1450 psi	2900 psi	5800 psi
6PJ	495	496	497	498	✓	1.50	3.17	4.50	6.34
6PJ	535	536	537	538	✓	1.75	3.96	5.60	7.92
6PJ	565	566	567	568	✓	2.00	4.76	6.73	9.52
6PJ	605	606	607	608	✓	2.10	6.08	9.39	12.16
6PJ	645	646	647	648	✓	2.50	7.40	10.46	14.80
6PJ	685	686	687	688	✓	2.80	9.51	13.45	19.02
6PJ	725	726	727	728	✓	3.00	11.89	16.81	23.78
6PJ	765	766	767	768	✓	3.50	15.32	21.67	30.64
6PJ	805	806	807	808	✓	3.80	19.02	26.90	38.04
6PJ	845	846	847	848	✓	4.30	23.51	33.25	47.02
6PJ	885	886	887	888	✓	4.70	29.59	41.85	59.18
6PJ	-	906	907	908	✓	5.00	33.03	46.70	66.06
6PJ	-	916	917	918	✓	5.20	35.40	50.07	70.80

Ordering Series + Code + Mat. Code = Order No.
example: 6PJ + 495 + 27 = 6PJ.495.27

No	Component		Order Number	Weight
1	Welding nipple Material: AISI 304	Length: L = 66mm	06S.J10.1C.00	0.830
2	Filter stabilizer unit Material: Stainless Steel	with filter S _F = 131	06P.456.1Y.00.00.0	0.140
		with filter S _F = 171	06P.456.1Y.01.00.0	0.160
3	Gasket Material: Copper		095.015.34.09.31.0	
4	Nozzle tip		6PJ.XXX.X see order table	0.140
5	Nut (standard) Material: AISI 431	Hex 41	06S.J00.11	0.150

Maximum permissible operation pressure: 6526 psi