
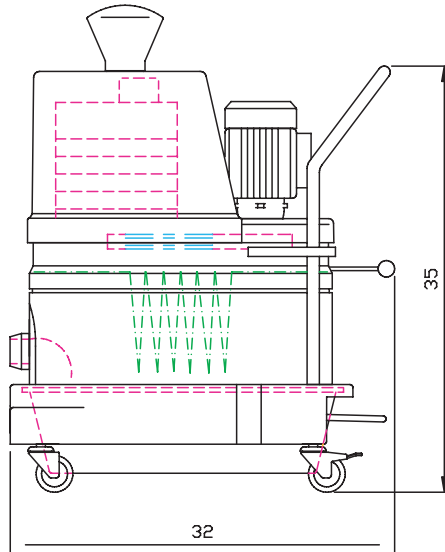


Continuous Duty Vacuum **WORKHORSE** DS 1150

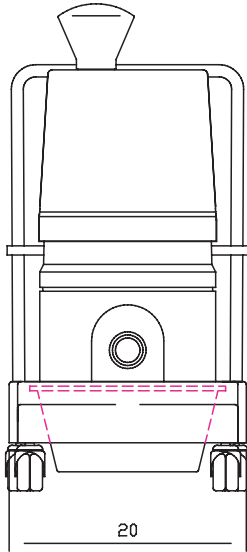

DS 1150 Standard Specifications

- 3 HP TEFC Motor, 208-230, 460 Volt, 3-Phase, 60 Hz, 6,3 Amps
- Motor Starter - Class 10 Motor Overload Protection
- 13 ft² MicroClean Filter with Manual Shaker System
- 2" (50mm) Inlet Connection with Bronze Cast Deflector
- Multi-Stage Centrifugal High Performance Turbine w/Relief Valve
- 9 Gallon, Foot Lever Actuated Dustpan
- Counterbalanced Base, 3" (76mm) Heavy Duty Conductive Casters
- Compression Cast Composite Modular Housing
- Carbon Impregnated, Anti-Static 10⁻⁶ Ohms

Base Price¹: DS 1150 - Call for Pricing

ADDER	DESCRIPTION
A	28 ft ² MicroClean Filter with Manual Shaker ¹
B	40 ft ² HEPA Filter with Minihelic ¹
35230B	Active Charcoal Filter Assembly, 20 lbs. of media ²
9853B	Motorized Filter Shaker with Switch, 3 Phase ²
18630B	Reverse Pulse with Electronics & Pressure Gauge ²
25143	Minihelic for Filter Monitoring ²
34878	Retractable Grounding Reel with Stainless Steel Clamp ²
1302120	Extended Caster Assembly with Two 6" Swivel & Two 6" Rigid Casters with Brakes ²
N	208/240 Volt, Single Phase ¹