



RM 8130

Interroll Roller Conveyor
Ball Table
Non-Powered

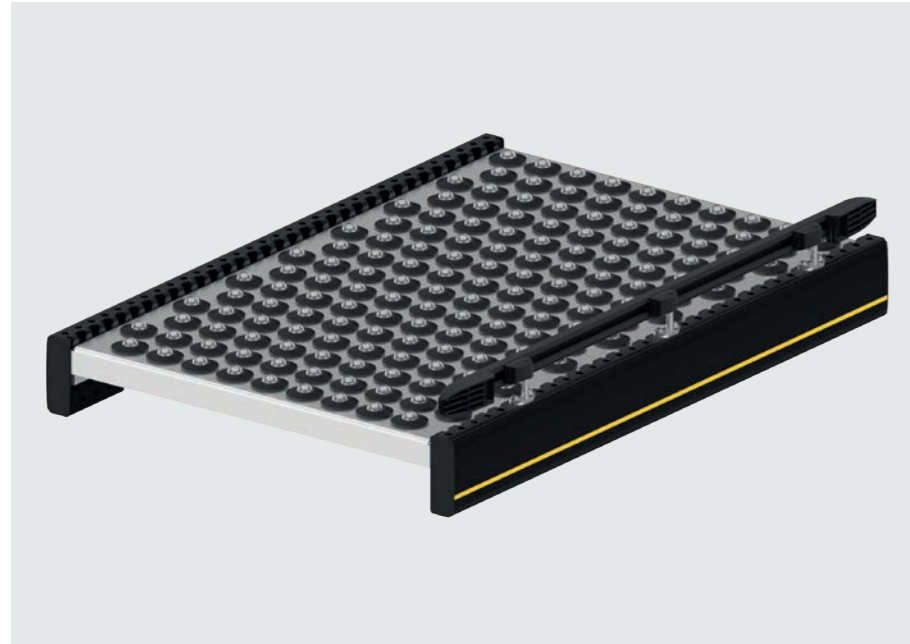

Dimensions

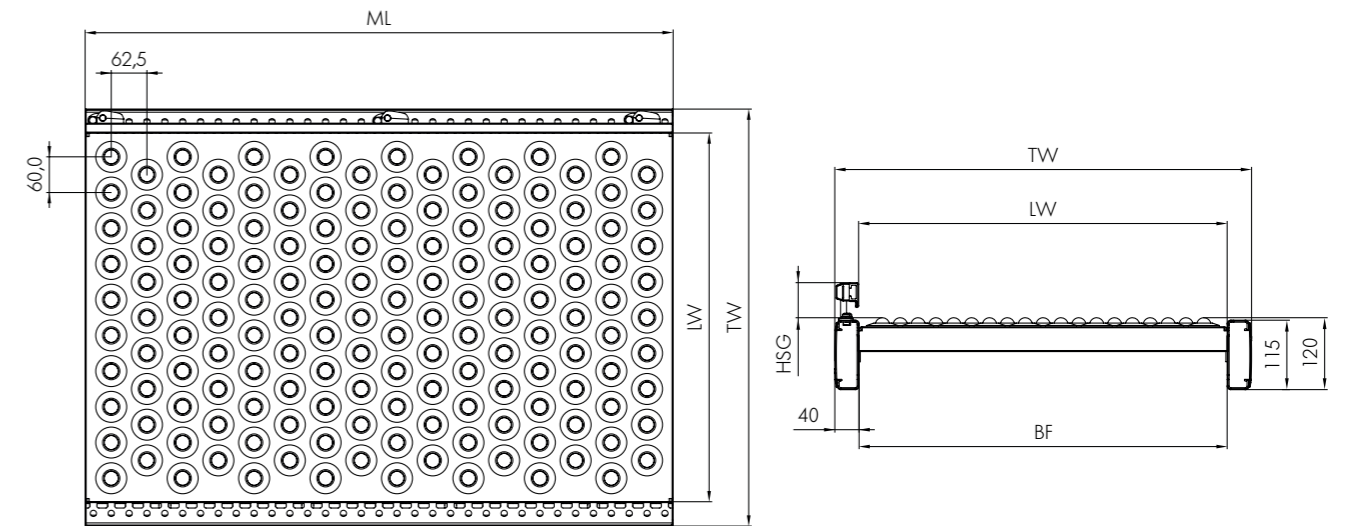

Product Description

The ball table transports materials with a solid bottom in any direction using very little force. It is especially suitable for workstation & inspection areas. So that a ball table can be combined with other conveyors, it is installed in a standard side profile.

Technical data

General technical data	Max. load capacity	100 kg/m
	Incline/decline	Not suitable
	Ambient temperature	-5 to +40 °C
Ball	Ball type	Interroll Series 5500
	Ball diameter	25.4 mm

BF	Between frames	420, 620, 840 mm others on request
LW	Lane width	BF (+120/-90 mm per side with flexible side guide)
ML	Module length	Max. 2040 mm
TW	Module width	BF + 80 mm
P	Pitch	60 mm
HSG	Height side guide	35 - 65 mm

Scope of supply

- The module is fully assembled
- Please order support stands and end caps separately