


## pressure reduction station

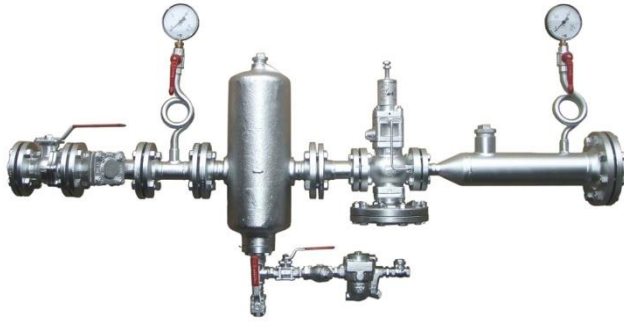

### Pressure reducing station DMS-PRO

Jumag steam boiler working standard with an adjustable steam pressure range of 6-11 bar overpressure. For working pressures between 0.3 - 8 bar g to keep constant or to the working pressure (while the steam boiler at a higher pressure) are pressure reducer for use. They are incorporated in the steam pipe between the steam boiler and the steam load.

The pressure reducing stations of Jumag can also be supplied in stainless steel.

The self-contained pressure reducing station Type DMS PRO for professional and reliable application consists of a check valve, a strainer, a pressure gauge to the inlet pressure, a steam dryer with attached condensate drain module, the pressure reducer, pressure gauge for the output pressure and an optional safety valve.

It is recommended that the installation side to create a bypass pipe so that for example can be set for a short time via a needle valve during maintenance on the pressure regulator the pressure required.

Connection and installation dimensions DMS-PRO:

Input terminal	Output port	Total length
DN25	DN40	1200mm
DN40	DN65	1350mm
DN50	DN80	1550mm