


LOW-ENERGY BOTTLE WASHING MACHINE

Functional scheme

CB 6-1-R-5,2 VdF ng

3.000 Bottles/hour

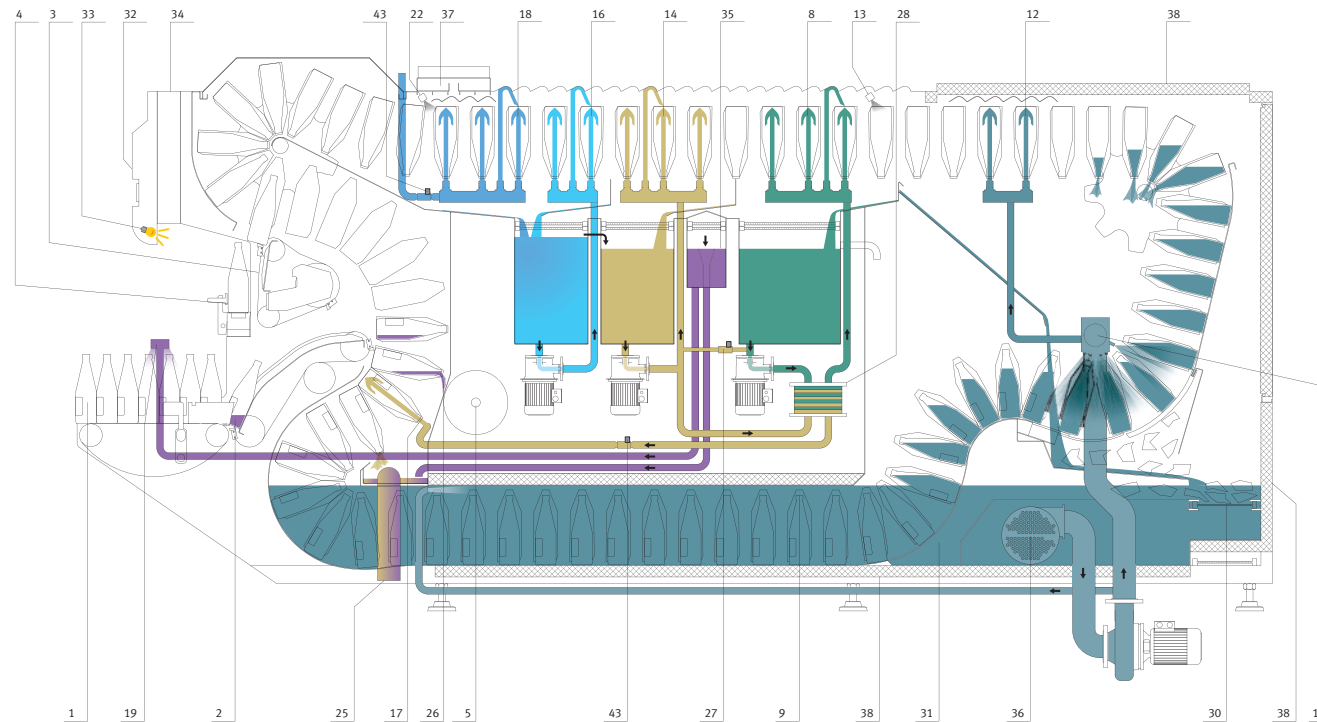

- 1 Bottle infeed table
- 2 Bottle feeding
- 3 Bottle outfeeding
- 4 Bottle outlet conveyor
- 5 Main drive motor
- 8 Caustic-II spraying
- 9 Caustic-soaking I
- 11 Caustic showering

- 12 Hot caustic spraying
- 13 Residual caustic deflation
- 14 Warm-water spraying I
- 16 Cold-water spraying
- 17 Water pre-spraying zone
- 18 Clock- and interval spraying zone
- 19 Pre-sprinkling
- 22 Residual water deflation

- 25 Drainage for service-water
- 26 Discharge of remains
- 27 Dosage for soaking
- 28 Heat recovery
- 30 Label discharger
- 31 Shards channel
- 32 Switchboard
- 33 Lights

- 34 Switchboard ventilation
- 35 Overflow
- 36 Heat exchanger
- 37 Vapor exhaust
- 38 Isolation
- 43 Electromagnetic valve