




AIR-OPERATED DOUBLE DIAPHRAGM PUMPS

- Self-Priming
- Non-Lubricated Air
- Pneumatic Circuit
- Compact Foot Print for Cabinet Mounting
- Dry Operation
- Stall Prevention
- Adjustable Flow Rate and Pressure
- Dead Head without Damage

MIDGETBOX

Intake/delivery connection	G 1/4" f
Air connection	G 1/8" f
Max. self-priming	9 feet
Max. flow rate	1.3 GPM
Max. head	90 PSI
Max. air supply pressure	90 PSI
Max. diameter of passing solids	N/A


Construction Polypropylene
Max. Viscosity 5,000 cps

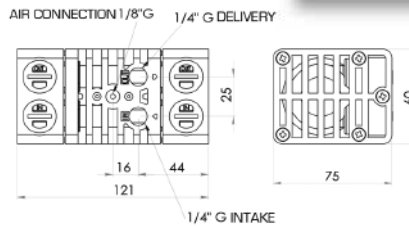

CUBIC 15

Intake/delivery connection	G 3/8" f
Air connection	G 3/8" f
Max. self-priming	9 feet
Max. flow rate	4.5 GPM
Max. head	90 PSI
Max. air supply pressure	90 PSI
Max. diameter of passing solids	0.02"

Construction Polypropylene & HALAR (ECTE)
Max. Viscosity 5,000 cps

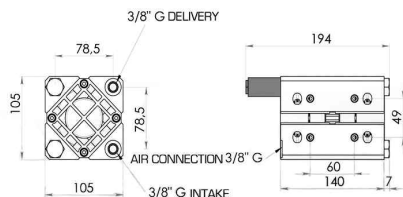

For information contact:

KNOLL America Inc.
313 West Girard
Madison Heights
USA-MI 48071
Tel. +1 (248) 588-1500
Fax +1 (248) 589-3400
www.knollamerica.com



KNOLL
.It works