

# Snubber

## Model : A050

Spec. sheet no. AD00-05

### Service intended

It is used for suppressing the effect of pressure pulse and pressure spike. It features the adjustable needle valve to restrict the flow as operating conditions may demand.




### Ordering information

Base model : 1<sup>st</sup> thru 4<sup>th</sup> characters

### A050 : Snubber

Max. static pressure up to 35 MPa

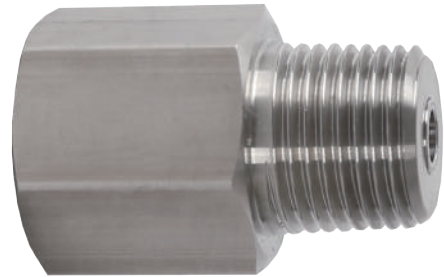


5 <sup>th</sup> character		6 <sup>th</sup> character		7 <sup>th</sup> character		8 <sup>th</sup> character	
Code	Unused type	Code	Material	Code	Gauge connection size	Code	Gauge connection type
A		D	316SS	0	1/4"	A	PF (F)
		F	316L SS	1	3/8"	B	PT (F)
		Z	Other	2	1/2"	C	NPT (F)
				9	Other	Z	Other

9 <sup>th</sup> character		10 <sup>th</sup> character		11 <sup>th</sup> thru 15 <sup>th</sup> character	
Code	Process connection size	Code	Process connection type	Code	Unused character
C	3/8"	G	PF (M)	A0000	
D	1/2"	H	PT (M)		
Z	Other	J	NPT (M)		
		Z	Other		

A050AD2BDJA0000 sample ordering number

## A050 : Type of mounting

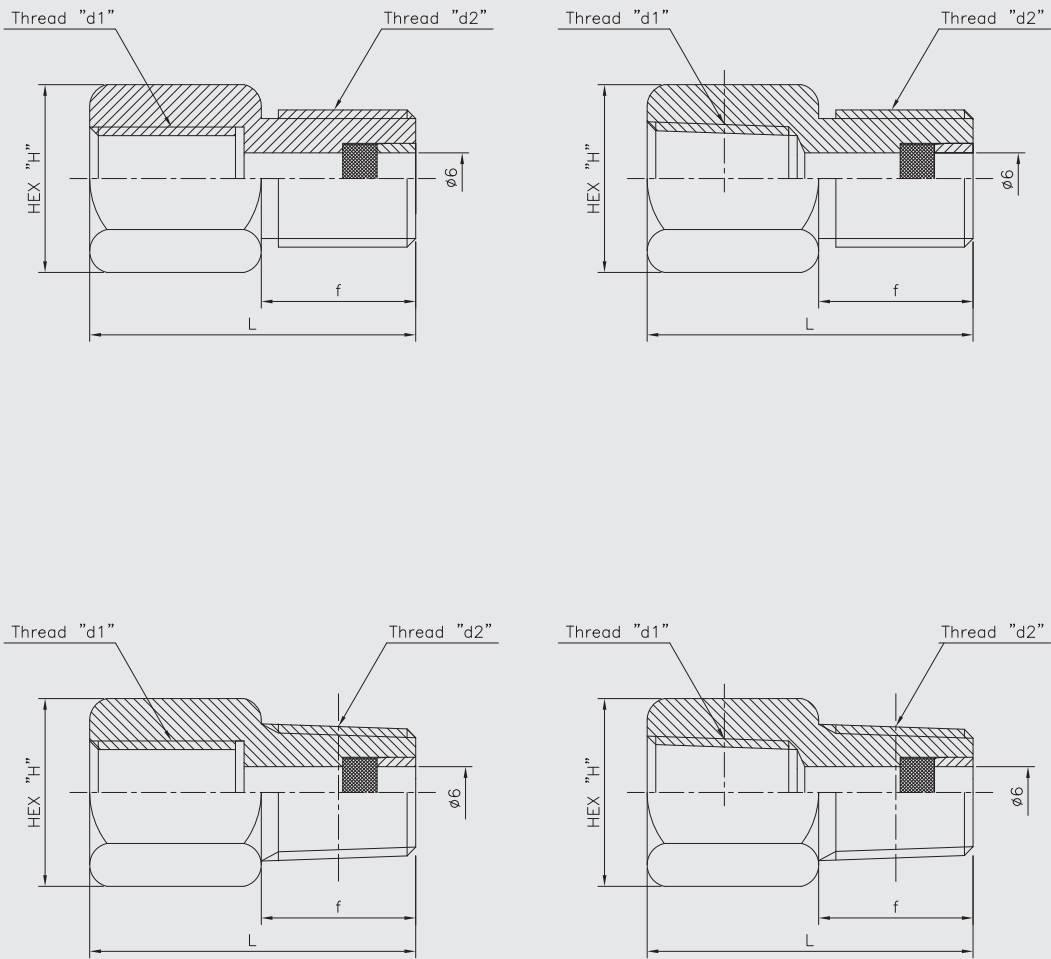

\* L : Maker standard

d1			d2			
→	PF	1/2	→	PF	→	3/8
→	PT		→	PT	→	1/2
→	NPT		→	NPT		
Selection : →						