

---

## Pressure Transmitter with Digital Switch

**Model : P800S (General Head)  
P800 (Explosion Proof Head)**

**WISE®**

### Advantages

- High precision micro-processor based digital pressure switch/transmitter for industrial applications
- Adjustable switch points allow the user to obtain various pressure settings for each of the 2 switches and span
- Measuring ranges from 0.2 to 350kgf/cm<sup>2</sup>
- Advanced piezoresistive silicon measuring cells
- Excellent accuracy and long term stability
- 4 digit LED or LCD local display
- 2switching points with analog output signal
- Measuring range turn down maximum 10 : 1

### Applications

The High precision micro-processor based digital pressure switch with analog output signal can be used for a wide range of applications in process control, automatic machinery and hydraulic or pneumatic system design.

- Chemical, petrochemical, food and drug process control
- Hydraulic and pneumatic equipments
- Machine tools and automatic machinery
- LPG and LNG transmission control and storage tank monitoring
- Engine monitoring and control
- Vacuum pump and injection molding machine Functions



**P800S**

**P800**

### Descriptions

P800 Series micro-processor based digital pressure switch is ideal for applications that require highly accurate process control and monitoring. The P800S/P800 with its built-in piezoresistive pressure measuring cell and the P800C/P800D with capacitive ceramic measuring cell, a 4-digit digital display. 2 switching points, 4~20mA analog output signal and a front function keys, offer the user all the advantages of a modern electronic pressure measurement. External adjustments allow the user to set the pressure ranges, switch points, deadband and zero or span calibration, etc. It has a water resistant, stainless steel housing for complete protection from harsh environment and its 4~20mA current output is ideal for remote monitoring of both primary and secondary process variables. It has been designed as an advanced device for measuring pressure of gases and liquids in industrial applications. It is extremely versatile and suitable for measuring dynamic or static pressure. The pressure to be measured acts through thin corrosion resistant stainless steel 316L diaphragm on a silicon measuring element. The pressure transmitting medium is silicon oil. The measuring element contains diffused piezoresistive resistors which are connected into a Wheatstone bridge. The output signal of this bridge is temperature compensated and converted

into a standardized current or voltage output signal.


## Specification

Input	
Model	P800S/P800
Technology	Piezoresistive silicon pressure sensor
Pressure ranges	0 ~ 0.1 to 350kgf/cm <sup>2</sup> relative pressure 0 ~ 1 to 350kgf/cm <sup>2</sup> absolute pressure
Pressure reference	Gauge, absolute, vacuum and compound
Overload	3x full scale without damage
Output	
output signal	2 switching points 4~20mA current output 2 switching points with analog output(4-20mA) Other signal available on request
Local display	LED or LCD 4 digit
Electrical connection type	Terminal Head
Electrical Specification	
Excitation voltage	24V DC, 85~260V AC (optional)
Load resistance max @ 24V	500Ω at 24V
Influence of excitation	0.01% FSO/V
Power ripple	≤500mV P-P
Reverse polarity	Protected
Shock resistance	No change in performance after 10Gs for 11ms
Vibration	0.1G (1 m/s/s) maximum
Response time(10~90%)	≤ 2 milliseconds
Switching current	Maximum 1.2A
Range turn down	Max. 10 : 1
Performance Specification	
Accuracy	≤ ± 0.25% FSO
Non-linearity	± 0.100 FSO typical
Repeatability	± 0.015 FSO typical
Pressure hysteresis	± 0.010 FSO typical
Long term stability	± 0.3% FSO over 6 month
Cutoff frequency(-3 d B)	≤2kHz
Reference temperature	35°C
Operating temperature range	-40 ~ 125 °C
Compensated temperature range	0 ~ 82 °C
Thermal sensitivity shift	≤ ± 0.2% FSO in reference to 35 °C typical
Thermal zero shift	≤ ± 0.2% FSO in reference to 35 °C typical
Thermal hysteresis	≤ ± 0.1% FSO in reference to 35 °C typical
Physical Specification	
Process connection	PT1/4" , PT3/8" , PT1/2" male thread PF1/4" , PF3/8" , PF1/2" male thread Female thread & other connections available on request
Electrical connection	PT1/2" female
Process media	Gases and liquids compatible with stainless steel 316 & ceramic
Materials wetted by process	Diaphragm : stainless steel 316L Housing : Aluminum Die-casting terminal head Gasket O-ring : Viton (HNBR, CSM, etc.)
Enclosure rating	IP65
Explosion protection	Ex d IIC T6 (Only P800)
Influence of mounting position	Under 0.5kgf/cm <sup>2</sup> , mounted vertically
Weight	Approx. (950g)
Options	Sealed diaphragm with thread connection Sealed diaphragm with flange mounting Siphon tube Sealed diaphragm with capillary





Note : ① For high pressure measurement, this model is available up to 2000kgf/cm<sup>2</sup> with thin film pressure sensor.

② If it is installed in explosive atmosphere, the covers should be kept tight when circuit alive.


## System connection for digital switch

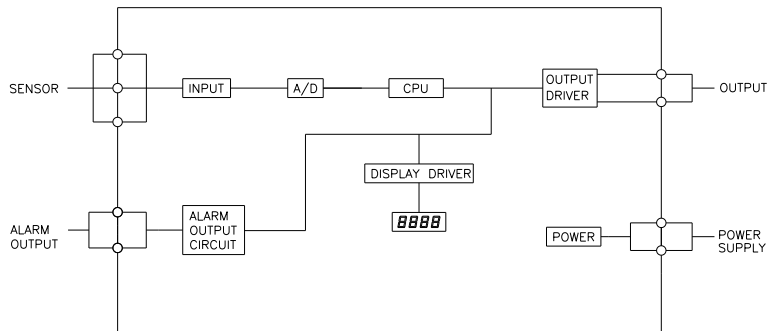


## Dimension (mm) Electrical connection

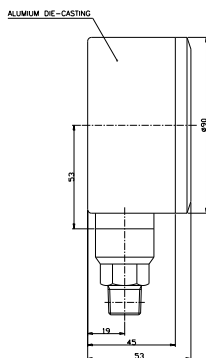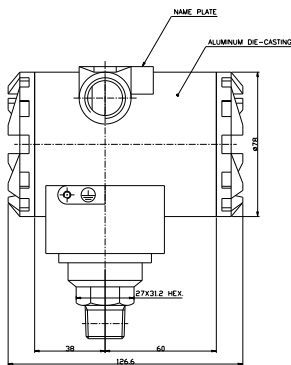

### Local Display

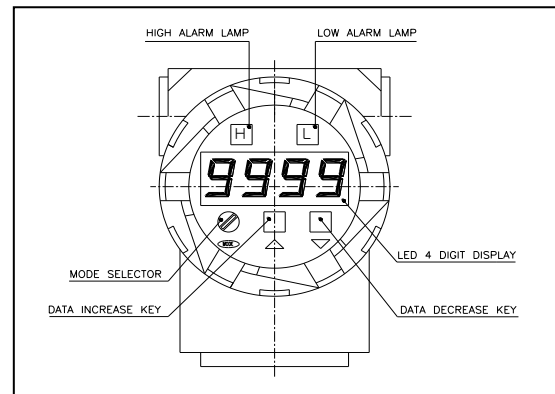

### Terminal head

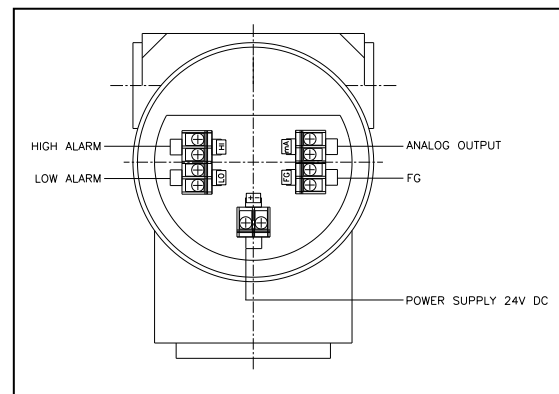

## Ordering Information

### Pressure Transmitter with Digital Switch

P800S												Piezoresistive silicon sensor
P800												Piezoresistive silicon sensor
	8											General head
	9											Explosion proof head
		E										With local display(LED type)
		C										With local display(LCD type)
		N										Without local display
			R									Relative pressure
			A									Absolute pressure
				M								Male thread
				F								Female thread
					T							PT thread as standard
					N							NPT thread
					F							PF thread
					X							Other process connections available on request
						1						1/4"
						2						3/8"
						3						1/2"
						X						Other units available on request
							H					Accuracy $\leq \pm 0.25\%$ FSO
								01				Measuring range 0 ~ 2000mmH <sub>2</sub> O
								02				0 ~ 5000
								03				0 ~ 1 kgf/cm <sup>2</sup>
								04				0 ~ 2
								05				0 ~ 5
								06				0 ~ 10
								07				0 ~ 20
								08				0 ~ 35
								09				0 ~ 50
								10				0 ~ 100
								11				0 ~ 200
								12				0 ~ 350
								XX				Other calibration ranges available on request
									M			calibration in mmH <sub>2</sub> O
									K			calibration in kgf/cm <sup>2</sup>
									A			calibration in Mpa
									B			calibration in bar
									P			calibration in psi
									X			Other units available on request
										N		None output signal
										R		2 switching points
										C		4~20mA Current output signal
										D		2 switching point with 4~20mA analog output
										X		Other signals available on request
										D		24V DC power supply
										A		24V AC power supply
										U		85~260V, AC
										X		Other power units available on request
										N		None options
										T		Sealed diaphragm with thread (option)
										F		Sealed diaphragm with flange mounting
										C		Cooling Fin
										S		Siphon tube
										X		Other accessories available on request

P800S | 8 | D | R | M | T | 3 | H | 7 | K | D | D | N | Sample ordering code

Specifications subject to change without notice