


NON-RETURN VALVES NV300 / NV400

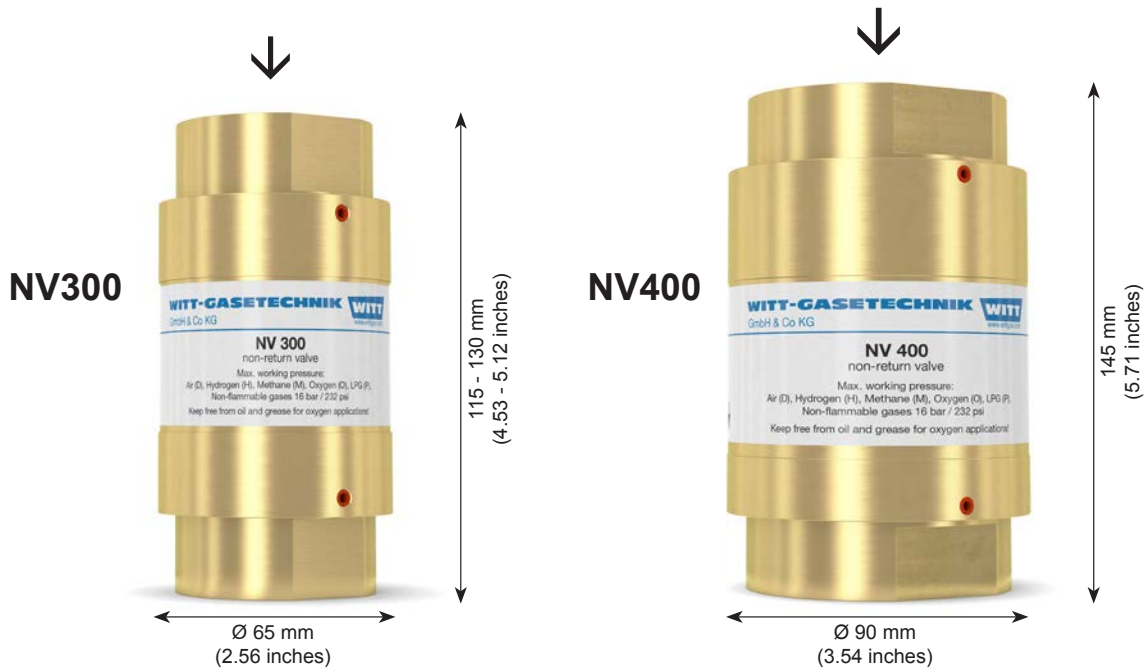

WITT non-return valves for reliable protection against dangerous reverse gas flow. Every non-return valve 100% tested.

Benefits

- a spring loaded non-return valve prevents back feeding of gases which could lead to unwanted gas mixtures
- low pressure drops – using complex valve assembly with low opening pressures NV300 – approx. 3.5 mbar, NV400 – approx. 3.0 mbar
- no leaks – using of a spring loaded valve assembly with elastomer sealing
- stainless steel filter (100 µm) in the gas inlet protects the non-return valve against dirt contamination, extending the service life
- diverse applications – useful for many technical gases
- reduce installation costs – the spring loaded valve is not affected by gravity and may be installed in any orientation

Operation / Usage

- non-return valves are used to protect equipment and pipelines against dangerous reverse gas flow. Use is possible for applications according to EN 746-2
- non-return valves are tested to EN 730-2. They may also be used as a safety device to protect against flashbacks (proved in accordance to EN 730-1 point 6.7) from combustion natural gas with air

- WITT non-return valves may be mounted in any position / orientation
- the maximum ambient / working temperature is 70 °C / 158 °F

Maintenance

- annual testing of the non-return valve, body leak tightness and flow capacity is recommended
- WITT is happy to supply special test equipment
- non-return valves are only to be serviced by the manufacturer. The dirt filter may be replaced according to model by competent staff

Approvals

Company certified according to ISO 9001 and PED 97/23/EC Module H
CE-marked according to:

- PED 97/23/EC

Cleaned for Oxygen Service according to:


- EIGA IGC Doc 13/12/E: Oxygen Pipeline and Piping Systems

Model	Max. working pressure [bar]	Housing-Material	Seal-Material	Weight [g]	Connection [inch]	Order-No.
NV300	Town gas (C), Natural gas (M) and LPG (P), Hydrogen (H), Oxygen (O), Compressed air (D) non-flammable gases 16	Brass	Elastomer	1,568	G 1	300038002
					G 1.1/4	300038031
NV400	Flashback resistant to EN 730-1 combustion with air Natural gas (M) (Model NV400) 3	Brass	Elastomer	2,789	G 1.1/2	400038024
					G 2	400038008

Other connections available upon request

NV300

Flow diagram for air (20 °C / 68 °F)

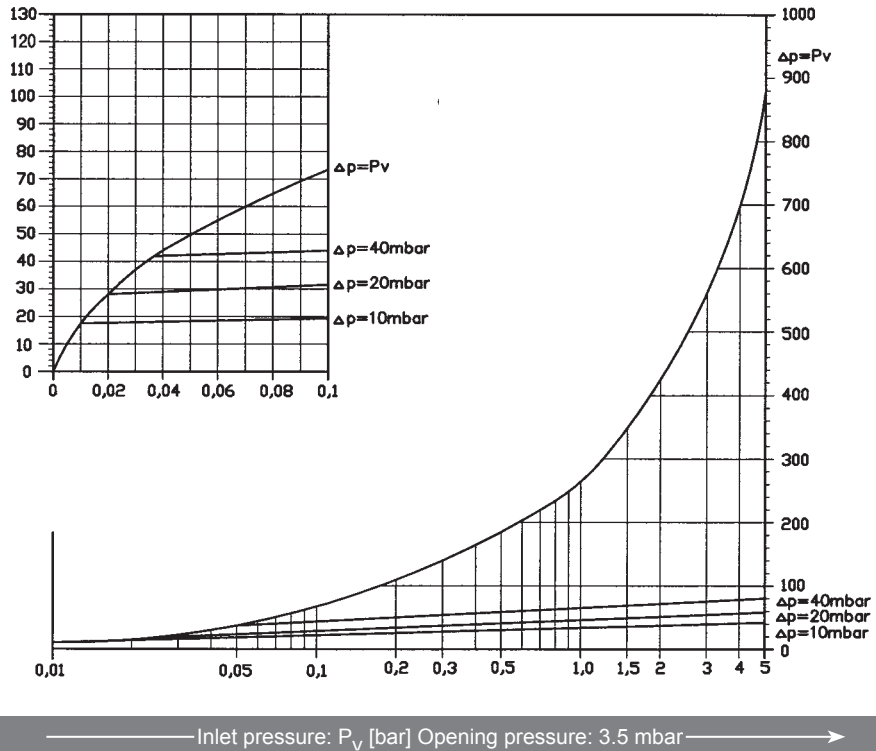


Conversion factors:

Butane	x 0.68
Natural Gas	x 1.25
Methane	x 1.33
Propane	x 0.80
Oxygen	x 0.95
Town gas	x 1.54
Hydrogen	x 3.75

NV400

Flow diagram for air (20 °C / 68 °F)

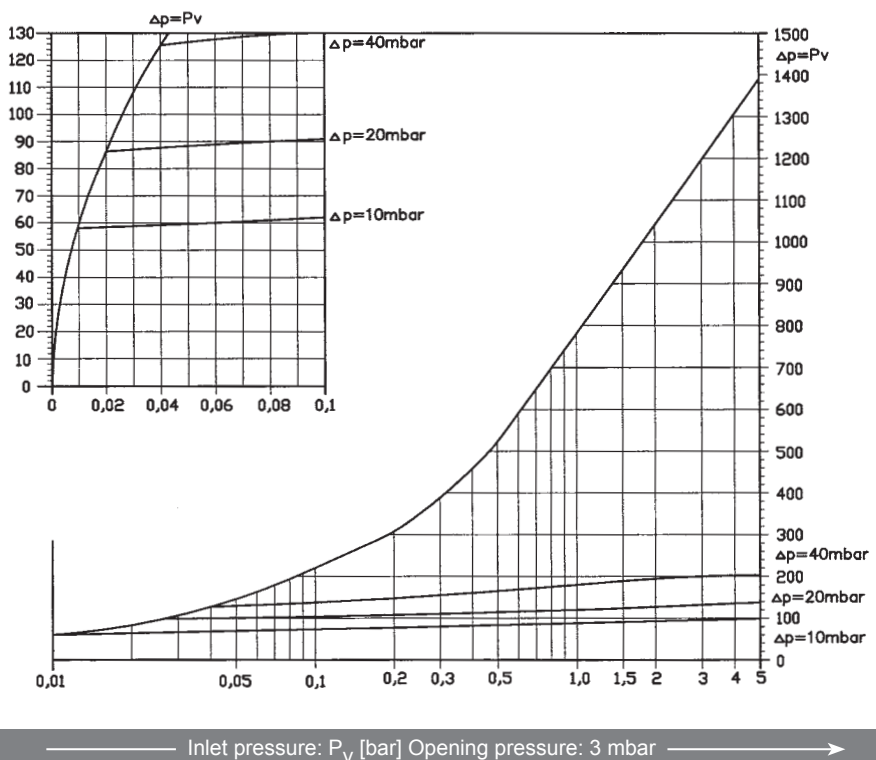

Conversion factors:

Butane	x 0.68
Natural Gas	x 1.25
Methane	x 1.33
Propane	x 0.80
Oxygen	x 0.95
Town gas	x 1.54
Hydrogen	x 3.75