


7282 Spa Road North Charleston, SC 29418 Phone: (843)569-2530 Toll Free: (800)465-4630 Fax: (843)569-2531

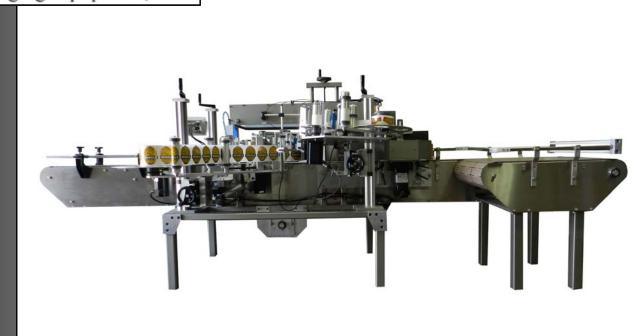

## **700NW Pressure Sensitive Labeler**

The model 700NW is a fully automatic labeler especially designed to be an easy machine to operate. It comes with a self-teaching label gap sensor that makes set up uncomplicated and trouble-free. Our new pinch grip design simplifies the way the web is threaded through the machine. Even though the 700NW Labeler is simple in its operation, the label application is still excellent. The machine has a high rate of consistency to 1/32" and a top speed of 1200 ipm. It is designed for non-round containers from 1" to 5" in thickness and for labels from 1" to 4  $\frac{1}{2}$ " tall and from 1" to 12" in length. Standard features on the model 700NW Include the top hold-down belt, aligning belts for infeed, an ultra-fast PLC and accurate


stepper-driven labeling applicators. Options such as label coding, extra tall label application, and a wrap belt for round containers make the 700NW versatile as well as easy to operate, with easy and quick changeovers and up to 99 saved recipes.



# Packaging Equipment, Inc.

#### Features

- Label 1" to 5" non-round containers.
- Apply labels from 1" to 4 <sup>1</sup>/<sub>2</sub>" tall and 12" long.
- Label can be moved up to 6" from base of container. 4 axes of adjustments.
- Accepts random or continuous bottle feed.
- Changeovers require no tools and take less than 10 minutes.
- Touchscreen Interface.
- Speeds to 100 bpm depending on label length.
- All variable speed conveyor, wrap station, top belt, and label speeds.
- High-speed counting on all delays.
- Maximum label roll size of 12".



### Options

- Hot Stamp coding for lot/date information.
- Wrap Belt for round containers
- Extra Tall Label Kit for labels up to 7 <sup>1</sup>/<sub>2</sub>" tall.
- Infeed Spacing Wheel powered by a separate DC motor.
  - "Gallon" upgrade for containers up to 6<sup>1</sup>/<sub>2</sub>".
- Locking Casters

#### Specifications

•

Conveyor width: Conveyor height: Conveyor length: Conveyor motor: Overall machine width: Overall machine height: Overall machine length: Overall machine weight: Labeling Head motors: Power requirements: Compressed air:

4 <sup>1</sup>/<sub>2</sub>" 33" Standard (+4" up) 84" 1/4 hp DC geared motor 60" 72" 88" 550 pounds Stepper-driven 120 volt AC, 60 cycle, 10 amp power 3-4 cfm @ 65 psi





7282 Spa Road North Charleston, SC 29418 Phone: (843)569-2530 Toll Free: (800)465-4630 Fax: (843)569-2531