

HEPA & ULPA Modules

TM-2™ - Ceiling Filter Modules

Product Overview


- Low profile
- Lightweight anodized extruded aluminum body
- Available with microglass HEPA or ULPA media or extremely durable, low pressure drop ePTFE
- Individually tested for certified performance
- One-piece aluminum top with integral duct collar connector
- Adjustable or Fixed Diffusion Disk
- Suitable for tee grid or gel seal ceiling grids



Specifications

Special Size Available	Yes
Filter Depth	Various
Frame Material	Aluminum
Separator Style	Ribbon
Antimicrobial Available	No
Max Operating Temperature	150°F (66°C)
Air Filter Certification	UL 900

Initial Resistance vs. Airflow Capacity

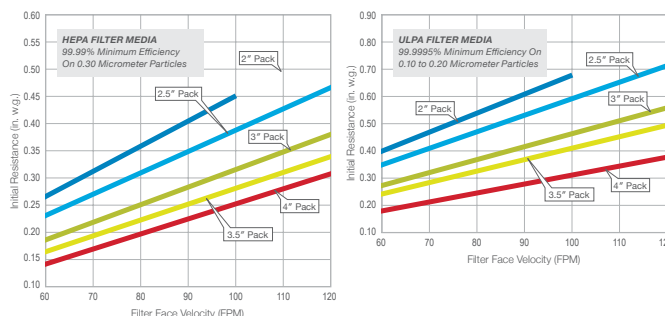

Product Information

Part Number	Style Code	Module Designator	Nominal Size (Feet)	Actual Size Inches (H x W x D)	Rated SCFM @ 100 FPM	Std. Pkg. Qty	Ship. Wt. Lbs/Box (± 7%)	Cubic Ft.
99.99% Efficient on 0.3 micron - Scan Tested (H)								
Aluminum Housing - 10" Adjustable Damper - Faceguard								
576-002-026	26A05A3POH2	TM2-43FS	2 x 2	23 $\frac{3}{8}$ x 23 $\frac{3}{8}$ x 5	335	1	25.0	3.0
576-002-025	25A05A3POH2	TM2-73FS	2 x 3.5	23 $\frac{3}{8}$ x 41 $\frac{1}{8}$ x 5	615	1	34.0	4.9
576-002-024	24A05A3POH2	TM2-83FS	2 x 4	23 $\frac{3}{8}$ x 47 $\frac{3}{8}$ x 5	710	1	39.0	6.0
Aluminum Housing - 10" Adjustable Damper								
576-000-026	26A05A3POH0	TM2-43S	2 x 2	23 $\frac{3}{8}$ x 23 $\frac{3}{8}$ x 5	335	1	25.0	2.8
576-000-025	25A05A3POH0	TM2-73S	2 x 3.5	23 $\frac{3}{8}$ x 41 $\frac{1}{8}$ x 5	615	1	34.0	4.9
576-000-024	24A05A3POH0	TM2-83S	2 x 4	23 $\frac{3}{8}$ x 47 $\frac{3}{8}$ x 5	710	1	39.0	5.5
99.9995% Efficient on 0.1 to 0.2 micron - Scan Tested (M)								
Aluminum Housing - 10" Adjustable Damper - Faceguard								
579-002-026	24E05A3POM2	TMU2-43FS	2 x 2	23 $\frac{3}{8}$ x 23 $\frac{3}{8}$ x 5	335	1	25.0	2.8
579-002-025	25E05A3POM2	TMU2-73FS	2 x 3.5	23 $\frac{3}{8}$ x 41 $\frac{1}{8}$ x 5	615	1	34.0	#N/A
579-002-024	24E05A3POM2	TMU2-83FS	2 x 4	23 $\frac{3}{8}$ x 47 $\frac{3}{8}$ x 5	710	1	39.0	6.2
Aluminum Housing - 10" Adjustable Damper								
579-000-026	26E05A3POM0	TMU2-43S	2 x 2	23 $\frac{3}{8}$ x 23 $\frac{3}{8}$ x 5	335	1	25.0	#N/A
579-000-025	25E05A3POM0	TMU2-73S	2 x 3.5	23 $\frac{3}{8}$ x 41 $\frac{1}{8}$ x 5	615	1	34.0	#N/A
579-000-024	24E05A3POM0	TMU2-83S	2 x 4	23 $\frac{3}{8}$ x 47 $\frac{3}{8}$ x 5	710	1	39.0	5.5

Additional sizes and knife-edge configuration available upon request.

AAF has a policy of continuous product research and improvement and reserves the right to change design and specifications without notice.

www.aafintl.com

